




# BUILDING 92 FLOOR PLAN - MECHANICAL

SCALE: 1/8" = 1'-0"



## BUILDING 95 FLOOR PLAN - MECHANICAL

SCALE: 1/4" = 1'-0"



MECHANICAL NOTES:

- 1 REFER TO SHEET MH411 ITEM 1 FOR DETAIL
- 2 REFER TO SHEET MH411 ITEM 2 FOR DETAIL

NOTE:

THE EXISTING VALVES SHOWN ARE APPROXIMATE SIZES ONLY. IT IS THE INTENT OF THE CONSTRUCTION DOCUMENT FOR THE EXISTING PNEUMATIC VALVE ACTUATORS TO BE UPGRADED TO DDC. THE EXISTING CONTROL VALVES ARE TO REMAIN IN SERVICE UNLESS OTHERWISE NOTED.

**NOTE:**


THE CONTRACTOR IS RESPONSIBLE TO VERIFY, LOCATE, AND ACCOUNT FOR ALL EXISTING CONTROL POINTS, PANELS, AND CONTROLLERS. INSPECT ALL PANELS PRIOR TO REPLACEMENT AND / OR RECONFIGURATION.

BID ITEM SUMMARY:

BASE BID: PROVIDE ALL EQUIPMENT AND WORK INDICATED ON PLANS.


BID ALTERNATE 1: SAME AS BASE BID, EXCEPT DEDUCT THE REPLACEMENT OF FLOOR/FIELD CONTROLLERS AND REUSE AND RECONFIGURE FOR NEW BACNET. EXISTING PANELS TO BE EXAMINED. NEWER EXISTING PANELS SHALL BE RECONFIGURED TO WORK IN OPEN PROTOCOL BACNET FORMAT. OLDER UNCONFIGURED / UNCONFIGURABLE PANELS SHALL BE REPLACED WITH NEW.

BID ALTERNATE 2: SAME AS BASE BID, EXCEPT DEDUCT THE CONVERSION OF ALL PNEUMATIC ACTUATED VALVES AND DAMPERS. PNEUMATIC CONTROLLERS TO BE UPDATED AND RECONFIGURED TO WORK IN OPEN PROTOCOL BACNET FORMAT.

 ADDENDUM 1 REVISION Revisions:	2-27-14 Date

CONSULTANTS:

Mark E. Awmiller, P.E.  
Florida PE No. 53973

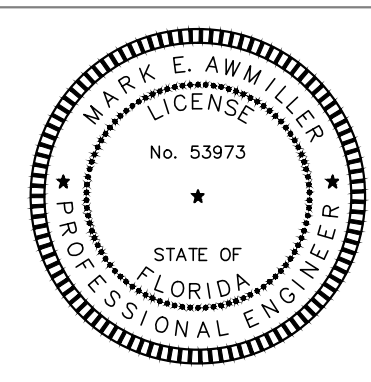

ARCHITECT/ENGINEERS:



550 North Reo Street  
Suite 203, Tampa, FL 33609  
813.289.4700  
COA # 8304

COA # 8304

	Drawing Title
--	---------------

**BUILDING 92 FLOOR  
PLAN - MECHANICAL**

Approved: Project Director

	<b>Project Title</b>
--	----------------------

## UPGRADE EMS

Project Number

573A-12-200

Building Number

Drawing Number

MH113

FINAL BID DOCUMENTS

Office of  
Construction  
and Facilities  
Management

